



GROUP
Electrical

MODEL
**2015MY
K900 (KH)**

NUMBER
PS347

DATE
September 2014




TECHNICAL OPERATIONS

SUBJECT: BATTERY REPLACEMENT – VENT HOSE MODIFICATION

When replacing a battery for K900 utilizing P/N 37110 H9000U; a slight modification to the vent elbow/hose will be needed in order to properly secure the vent hose assembly to the replacement battery, as outlined below.


1. Locate and remove the original vent hose assembly from the battery being replaced.

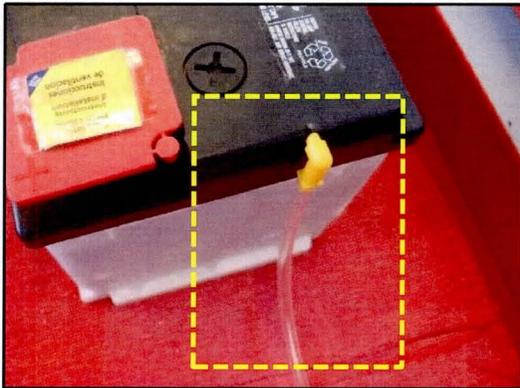


2. Remove the elbow from the vent hose.




3. Use a pair of side cutters to remove three sides from the vent elbow flange.

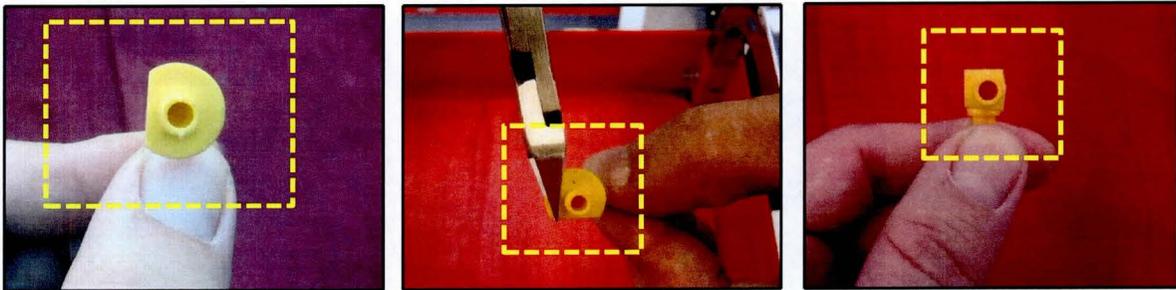

4. Use the side cutters to trim the end of the vent hose by 6mm (1/4") mm.

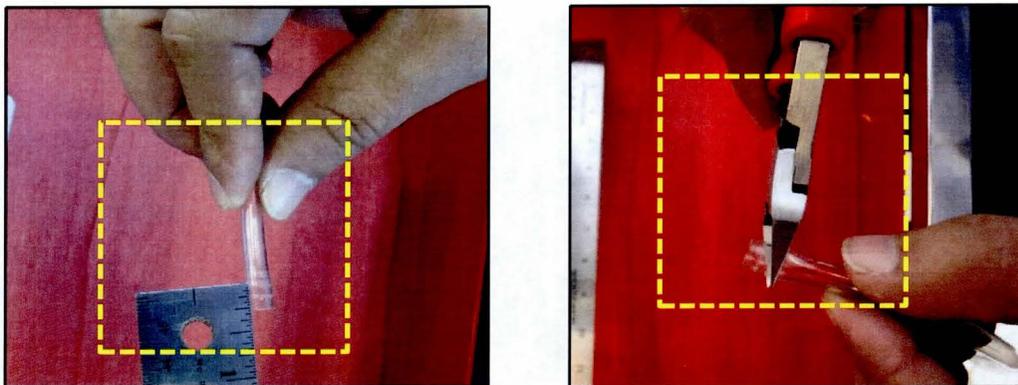

5. Install the vent elbow onto the vent hose. **Note: Make sure the modified end of the elbow is installed into vent hose.**

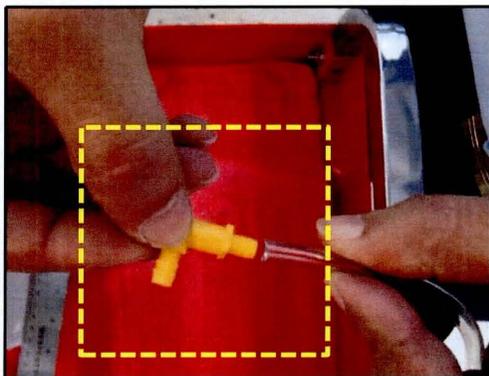

6. Reinstall the vent hose assembly into the vent hole nearest the positive terminal of the replacement battery.