



Sure Power Battery Equalizer **RECALL**

Models Affected: 2004 Ultra LMB (L3RE), 2003-2006 Ultra LF (L4RE), 2004-2007 Express (M4RE)

ISSUE

An electrical component in the battery equalizer may experience a failure mode potentially resulting in smoke being emitted or excessive heat being produced which could possibly result in a fire which could cause property damage or result in injury to vehicle occupants.

CORRECTIVE ACTION

Inspect battery equalizers for product serial number. Replacement battery equalizers for those that fall within the suspect product serial number range will be shipped to you at no charge.

PROCEDURE

WARNING: Always follow all Federal, State, Local and Shop safety standards and use proper safety equipment, and thoroughly read and understand all instructions before performing these procedures.

1. Park the vehicle on a level surface, apply parking brake, turn engine off, remove key and chock wheels.
2. Open the battery compartment and disconnect the battery ground and positive cables from the battery terminals.

[CAUTION] When disconnecting the batteries, remove the Negative cable first.


3. Locate the Sure Power battery equalizer. See detail views on page 2 for location by product type.
4. The battery equalizer must be inspected and the serial number, date inspected and body number or vehicle identification number recorded on the attached Recall R13WN Inspection Reply Sheet.
5. No replacement is required if the product serial number does NOT fall within the suspect range.
6. If the product serial number falls within the suspect serial number range remove and replace per the following:
 - a. Disconnect the ground, 12 volt, and 24 volt, positive cables from the equalizer by removing the isolation nut (retain for installation step).
 - b. Remove existing fuse and flat washer from equalizer (retain for installation step).
 - c. Remove six (6) equalizer mounting screws (retain for installation step).
 - d. Install replacement equalizer (supplied) with six screws removed in step “c”.
 - e. Install flat washer and fuse removed in step “b” (see detail A).
 - f. Install isolation nut removed in step “a” (see detail A on page 2) and torque to 100 inch-lbs. **Be careful not to over-torque**
7. Replacement battery equalizers for those that fall within the suspect product serial number range will be shipped to you at no charge. You must provide the correct shipping address, contact name and telephone number on the attached Recall R13WN reply sheet in order to receive replacement battery equalizers.




Sure Power Battery Equalizer

RECALL

There is only one label location on the product as shown in the picture below, with the serial number in the white section on the end opposite the terminals:

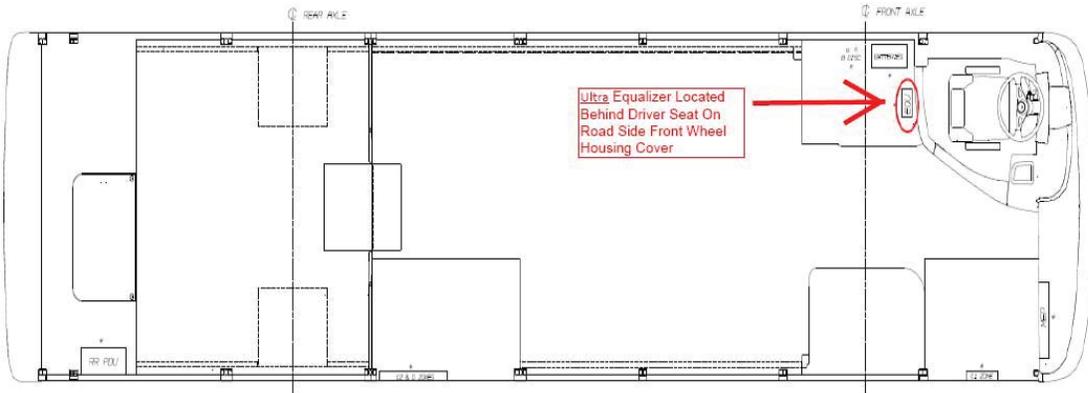

Express Equalizer Located Curb Side On RH Side Above The Battery Tray

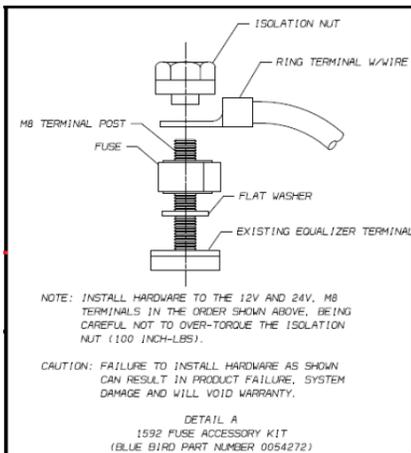

RECALL CAMPAIGN R13WN